


C42GM is a singlemode LTE CAT M1/NB1/NB2 (upgradable to Release 14) compatible Smart Cellular Module based on 3GPP Release 13, that comes with an integrated eSIM. C42GM has a healthy battery life profile of ten years due to Deep Sleep Mode capability. It also comes with integrated GNSS* and Sigfox*. The integrated eSIM coupled with Cavli Hubble Global Connectivity ensures the module can be deployed across the globe, making it an ideal solution for logistics, automotive, vehicle tracking systems and more.

Re-imagining Cellular IoT Solutions

FEATURES

Excellent Indoor & Underground penetration
Optimized for higher bandwidth including voice
Paired for devices in mobility
Perfect for localized applications such as -
Point of Sales, Health Monitoring,-
Fleet Management and Asset Tracking

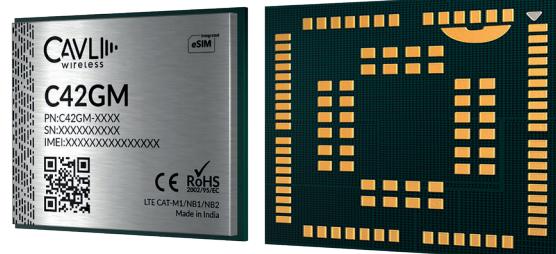

TECHNICAL HIGHLIGHTS

PARAMETERS	LTE-M1	NB1
BANDWIDTH	1.4 MHz	180 KHz
PEAK DATA RATE	<1119 Kbps	<60 Kbps
UPLINK SPEED	1119 Kbps	60 Kbps
DOWNLINK SPEED	588 Kbps	20 Kbps
LATENCY	50-100 ms	1.5-10s
BATTERY LIFE	5-10 years	10+ years
PENETRATION	Good	Excellent
VOICE	VoLTE	No

Features	
Cellular Connectivity	LTE-M1/NB-IoT
Flash	16/32 MB
GNSS	Optional w/ L1
eSIM Integration	Optional Hubble eSIM
Sigfox	Available
CAN-FD	Available
OpenSDK	Available



INTERFACES

1.8V/3V SIM Interface
Operating Voltage: 3.1V to 4.2V; Typ 3.6V
1xUSB2.0, 3xUART, 1xUSIM, 8xGPIO, 1xPCM, 1xI2C, 2xADC, 2xANT, CAN Bus

APPLICABLE REGIONS

Global

Cavli Hubble™ is our proprietary Connectivity as a Service (CaaS) cloud platform for global cellular data subscription management, module & modem management, enabling businesses and industries to build and deploy easily scalable global wireless IoT solutions.

*Optional Features